


How to Measure By-Pass

- Inside mount must have a minimum jamb depth of 2 in.
- Outside mount standard by-pass will project 6 5/8 in from the wall.

Inside Mount

- Measure window width and height in three places (top, middle, and bottom) and record the smallest measurement to the nearest 1/8 in.
- Check for window squareness by measuring both diagonals from corner to corner. If the difference between the diagonals is more than 1/2 in., an outside mount is recommended.
- Do not make any deductions, allowances or additions.

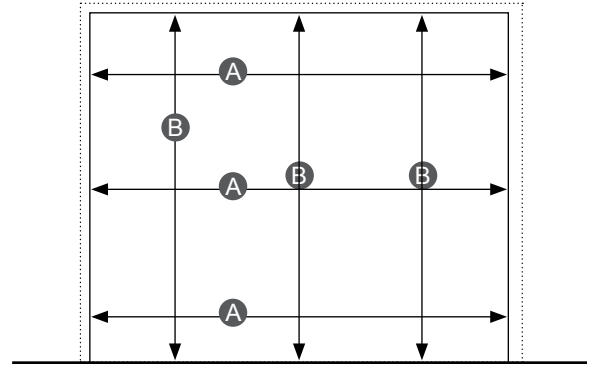


Outside Mount

If Mounting On Wall without trim, take width and height measurements outside the window opening in three places (top, middle, and bottom), measurements. Ensure that you have at least 2 1/4 in of clearance above and on each side of your window opening.

If Mounting On Trim, take width and height measurements from the outside edges of your trim in three places (top, middle, and bottom), and record the largest measurements. You will need at least 2 1/4 in of flat trim for the Shutter frame to mount onto.

If Mounting Outside Trim, take width and height measurements from the outside edges of your trim in three places (top, middle, and bottom), and record the largest measurements.

INSIDE MEASUREMENTS



SQUARENESS CHECK

Only If Divider Rail is Being Used

- The measurement recorded is determined from the bottom of the floor or sill to the middle of where the divider rail is to be located.
- One divider rail is required for panels over 66 in with a maximum 50 in between the middle of the divider rail and either top or bottom rail.
- Two divider rails are required for panels over 90 inches in height with a maximum 50 in between any two rails.

Choice of Panel Configuration

Determine from pages 5-7.

Order Valance



Choose between the 3 1/2 in standard valance or 5 in crown valance and select the appropriate valance returns at time of order.



Choose Your By-Pass Panel Configurations

P2BP-L P2BP-R



Both panels will operate allowing access to the window or door.

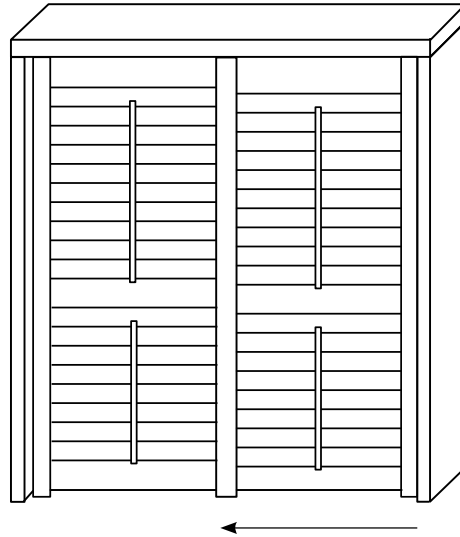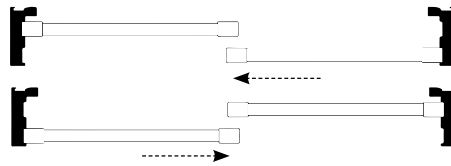

Minimum Width: 24"
Maximum Width: 72"
Minimum Height: 20"
Maximum Height: 120"

P3BP-LCR

Center panel opens over left or right panel.

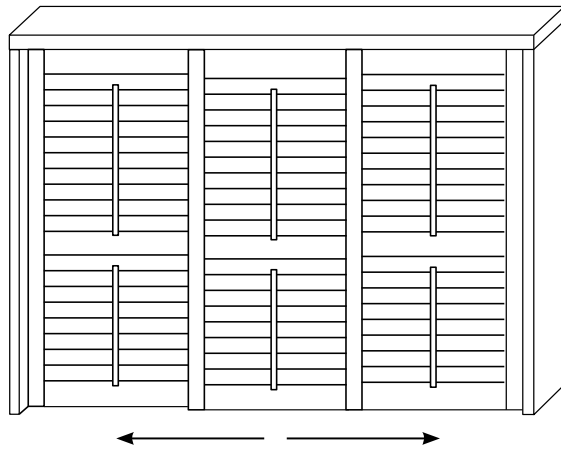


Minimum Width: 36"
Maximum Width: 108"
Minimum Height: 20"
Maximum Height: 120"

Choose Your By-Pass Panel Configurations

P4BP-LCCR


Left center panel opens over left panel,
Right center panel opens over right panel.

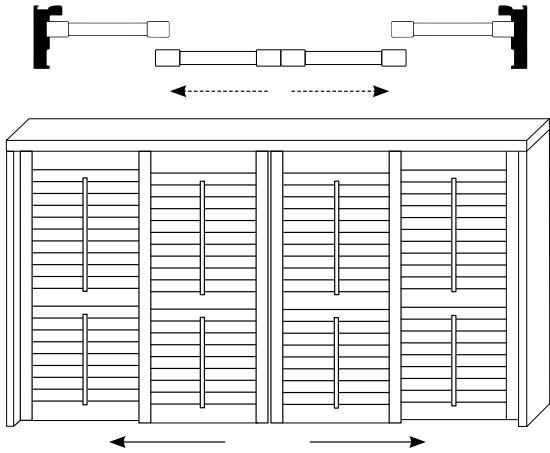

Minimum Width: 48"
Maximum Width: 144"
Minimum Height: 20"
Maximum Height: 120"

P4BP-2L2R


Two right panels open over two left panels.

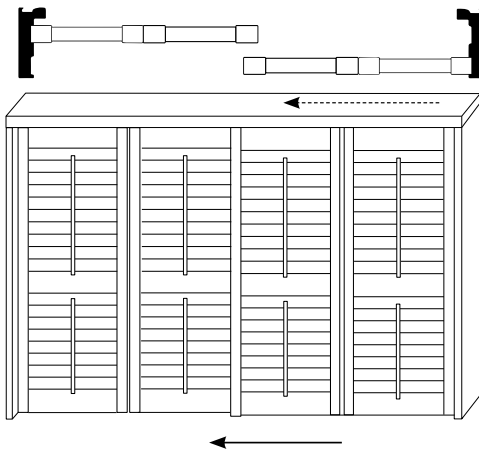

Minimum Width: 48"
Maximum Width: 144"
Minimum Height: 20"
Maximum Height: 120"

P4BP-2R2L

Two left panels open over two right panels.

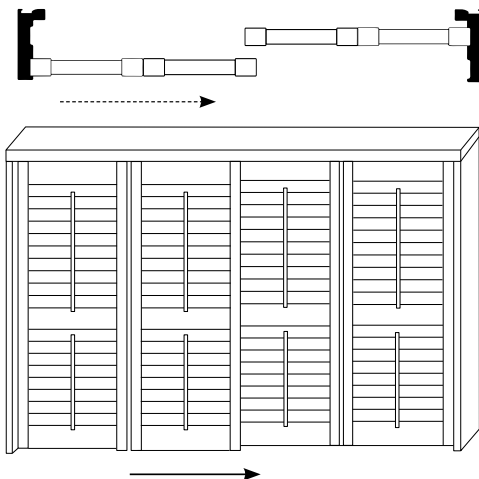


Minimum Width: 48"
Maximum Width: 144"
Minimum Height: 20"
Maximum Height: 120"

Choose Your By-Pass Panel Configurations

P6BP-2L2C2R


Two center panels, open over either two left or two right panels.

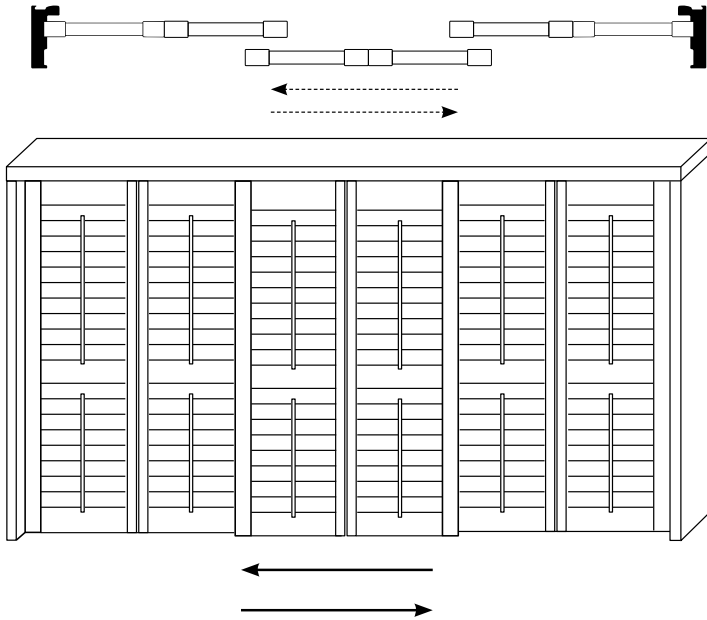

Minimum Width: 72"
Maximum Width: 180"
Minimum Height: 20"
Maximum Height: 120"

P6BP-2LCC2R

Two center panels, not joined, open either two left or two right panels.

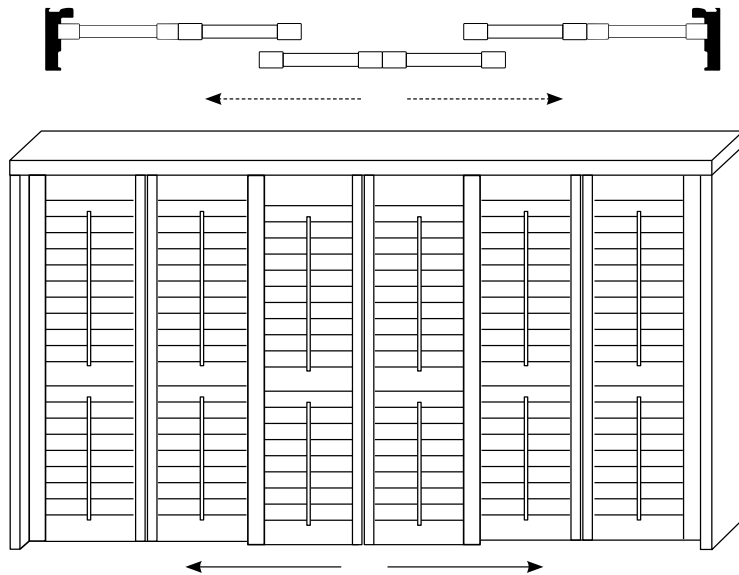

Minimum Width: 72"
Maximum Width: 180"
Minimum Height: 20"
Maximum Height: 120"

GUIDELINES FOR FILLING OUT THE BY-PASS TRACK SYSTEM ORDER FORM

1 LINE

The line number is shown on all product labels to make installation easier.

2 ROOM

Room location where product is being installed.

3 TYPE

Choose the applicable shutter type.

4 PANEL CONFIGURATION

Choose the panel configuration and copy on to the order form.

5 WIDTH AND HEIGHT

Measure width and height to the nearest 1/8 in.

6 LOUVER SIZE

3 sizes are offered 2 1/2 in., 3 1/2 in., and 4 1/2 in.

7 COLOR

Choose between white, ivory, and vanilla.

8 CONTROL TYPE

Select between Tilt Bar, Gear Closure System, and Motorized Tilt.

NOTE: Motorized Tilt can be ordered with or without a tilt bar for aesthetics. If tilt bar is desired please note in special instructions. If not, the motorized default option is no tilt bar.

9 MOUNT

IM indicates an inside mount that can be within the opening, fully or partially recessed.

OM indicates an outside mount in which the frame is attached to the face of the wall or trim.

10 NUMBER OF FRAME SIDES

No selection needed.

11 FRAME EXTENSIONS

Extends the frame into the room for an outside mount only. The track frame extension is 3/4 in. Enter the number of frame extensions required, to gain the proper amount of depth clearance based on the louver size and tilt option. 0-3 extensions are available.

12 DIVIDER RAIL

A divider rail adds support to the panel to prevent sagging. A divider rail is required on any shutter over 66-inches in height. A second divider rail is required for heights 90-inches or greater.

13 VALANCE TYPE

3 1/2 in. Standard Valance is the default for By-pass track systems. A 5-in Crown Valance is optional.

14 VALANCE RETURN

Valance returns can be "Square" cut if the frame and valance are mounted inside the opening. Standard returns for outside mounts are cut so they are in line with the back of the frame.

15 REMOTE TYPE & QUANTITY (Motorized Tilt Only)

Specify type and quantity (3-Channel or 6-Channel or 0 (zero) if not needed)

Remote quantity on this form will be in addition to any remote quantity ordered with any other shutter order.

16 SPECIAL INSTRUCTIONS

Enter the special instructions that need to be added specific to the order.

**** IMPORTANT! Shutter louvers cannot open when panels are stacked in front of one another.**